

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 338 319 B1

(12)

EUROPEAN PATENT SPECIFICATION

- (45) Date of publication of patent specification: **07.06.95** (51) Int. Cl.⁶: **C08L 69/00, C08K 5/06, C08K 5/15, C08K 5/54, //(C08L69/00,71:02)**
- (21) Application number: **89105950.3**
- (22) Date of filing: **05.04.89**

(54) **Gamma radiation resistant polycarbonate compositions.**

(30) Priority: **18.04.88 US 183023**
18.01.89 US 297264

(43) Date of publication of application:
25.10.89 Bulletin 89/43

(45) Publication of the grant of the patent:
07.06.95 Bulletin 95/23

(84) Designated Contracting States:
DE FR GB IT NL

(56) References cited:
EP-A- 0 228 525

(73) Proprietor: **MILES INC.**
One Mellon Center
500 Grant St.
Pittsburgh, PA 15219-2502 (US)

(72) Inventor: **Krishnan, Sivaram**
1653 Little Meadow Road
Pittsburgh, PA. 15241 (US)
Inventor: **Keegan, Richard E.**
141 Friar Lane
McMurray, PA 15317 (US)
Inventor: **Nodelman, Neil H.**
556 Harrogate Road
Pittsburgh, PA.15241 (US)
Inventor: **Lundy, Charles E.**
1014 Chestnut Ridge
Pittsburgh, PA.15205 (US)

(74) Representative: **Gremm, Joachim, Dr. et al**
Bayer AG
Konzernverwaltung RP
Patente Konzern
D-51368 Leverkusen (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).


EP 0 338 319 B1

DescriptionField of the Invention

- 5 The invention is directed to polycarbonate molding compositions and more particularly, to thermoplastic compositions resistant to gamma radiation.

Summary of the Invention

- 10 The invention relates to thermoplastic polycarbonate molding compositions which are rendered improved resistance to gamma-radiation by the incorporation therewith of 0.5 to 5.0 percent by weight of an end-capped compound conforming to formula (I)

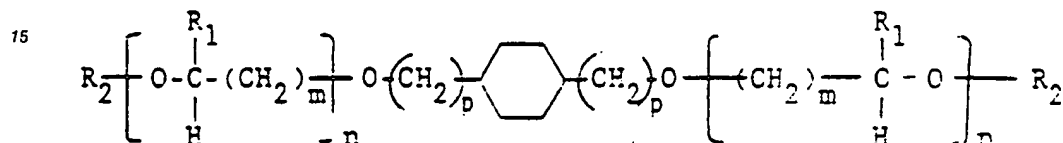

wherein R₁ denotes a hydrogen atom or a C₁-C₄ alkyl, R₂ denotes a silyl or pyranyl group, n is an integer of from 0 to 70, p is 0 or 1 and m is 1 to 4.

Pyranyl in the sense of instant invention represents not only the pyran-ring, but also the dihydropyran-ring and the tetrahydropyran-ring.

- 25 The compositions of the invention exhibit excellent resistance to yellowness and formation of haze which commonly characterize gamma irradiated articles molded from polycarbonate.

BACKGROUND OF THE INVENTION


- 30 Because of its physical and mechanical properties polycarbonate resins were found to be eminently suitable for a variety of applications in the medical field. Applications which require sterilization by exposure to gamma radiation present a problem since polycarbonate tends to yellow and show increased haze. The art is noted to include U.S.-A-4,624,972 which disclosed polycarbonate compositions resistant to gamma radiation containing an ester of an aromatic polycarboxylic acid. EP-A-152,012 disclosed a method for
- 35 increasing the ionizing radiation resistance of polycarbonate by including in the composition a non-polymeric compound which is characterized by a strong oxidizing action and/or reaction at high reaction rate with active species such as E or OH radicals or hydrated electrons formed by ionizing radiation. U.S.-A-4,451,641 disclosed a container prepared from a copolyester which has been modified with either a dimer acid or a dimer glycol. The copolyester is said to have an improved resistance to gamma radiation.
- 40 Radiation stable polyolefin compositions have been disclosed in U.S.-A-4,460,445. Copending U.S. Patent Application Serial No. 67,670 filed June 26, 1987 relates to relevant technology.

DETAILED DESCRIPTION OF THE INVENTION

- 45 The composition of the invention comprises a polycarbonate resin and a stabilizing agent in an amount sufficient to enhance the resistance of the resin to yellowness upon exposure to gamma radiation. The composition contains 0.5 to 5 percent of the stabilizing agent.


- The polycarbonate resins useful in the practice of the invention are homopolycarbonates, copolycarbonates and terpolycarbonates or mixtures thereof. The polycarbonates generally have a weight average
- 50 molecular weight of 10,000-200,000, preferably 20,000-80,000 and their melt flow rate, per ASTM D-1238 at 300°C, is about 1 to about 65 gm/10 min., preferably about 2-15 gm/10 min. They may be prepared, for example, by the known diphasic interface process from a carbonic acid derivative such as phosgene and dihydroxy compounds by polycondensation (see DE-A-2,063,050; 2,063,052; 1,570,703; 2,211,956; 2,211,957 and 2,248,817; FR-A-1,561,518; and the monograph H. Schnell, "Chemistry and Physics of
- 55 Polycarbonates", Interscience Publishers, New York, 1964).

In the present context, dihydroxy compounds suitable for the preparation of the polycarbonates of the invention conform to the structural formulae (1) or (2)

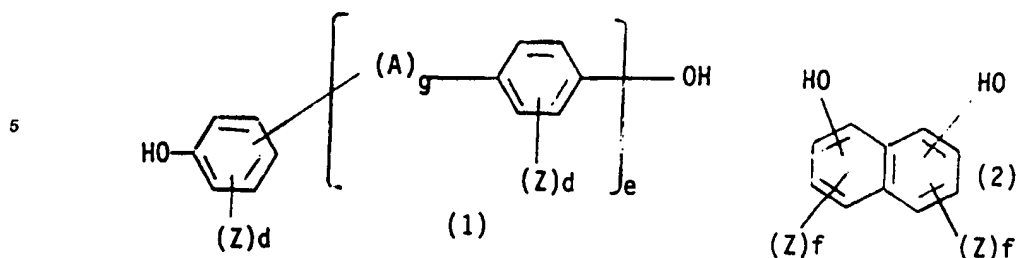

wherein

A denotes an alkylene group with 1 to 8 carbon atoms, an alkylidene group with 2 to 8 carbon atoms, a cycloalkylene group with 5 to 15 carbon atoms, a cycloalkylidene group with 5 to 15 carbon atoms, a carbonyl group, an oxygen atom, a sulfur atom, -SO- or -SO₂- or a radical conforming to

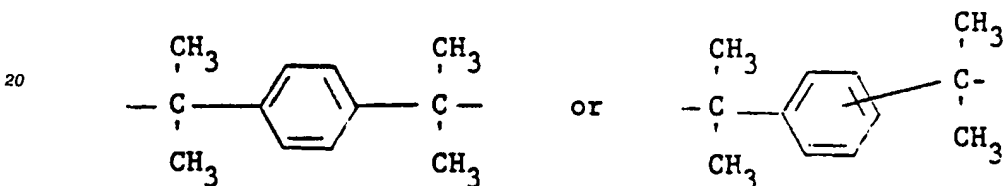

25

e and g both denote the number 0 to 1;

Z denotes F, Cl, Br or C₁-C₄-alkyl and if several Z radicals are substituents in one aryl radical, they may be identical or different one from the other;

d denotes an integer of from 0 to 4; and

30 f denotes an integer of from 0 to 3.

Among the dihydroxy compounds useful in the practice of the invention are hydroquinone, resorcinol, bis-(hydroxyphenyl) alkanes, bis-(hydroxyphenyl) ethers, bis-(hydroxyphenyl)-ketones, bis-(hydroxyphenyl)-sulfoxides, bis-(hydroxyphenyl)-sulfides, bis-(hydroxyphenyl)-sulfones, and α,α' -bis-(hydroxyphenyl)-diisopropyl-benzenes, as well as their nuclear-alkylated compounds. These and further suitable aromatic dihydroxy compounds are described, for example, in U.S. -A-3,028,356; 2,999,835; 3,148,172; 2,991,273; 3,271,367; and 2,999,846. Further examples of suitable bisphenols are 2,2-bis-(4-hydroxyphenyl)-propane (bisphenol A), 2,4-bis-(4-hydroxyphenyl)-2-methyl-butane, 1,1-bis-(4-hydroxyphenyl)-cyclohexane, α,α' -bis-(4-hydroxyphenyl)-p-diisopropylbenzene, 2,2-bis-(3-methyl-4-hydroxyphenyl)-propane, 2,2-bis-(3-chloro-4-hydroxyphenyl)-propane, bis-(3,5-dimethyl-4-hydroxyphenyl)-methane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane, bis-(3,5-dimethyl-4-hydroxyphenyl)-sulfide, bis-(3,5-dimethyl-4-hydroxyphenyl)-sulfoxide, bis-(3,5-dimethyl-4-hydroxyphenyl)-sulfone, hydroxybenzophenone, 2,4-bis-(3,5-dimethyl-4-hydroxyphenyl)-cyclohexane, α,α' -bis-(3,5-dimethyl-4-hydroxyphenyl)-p-diisopropylbenzene and 4,4'-sulfonyl diphenyl.

Examples of particularly preferred aromatic bisphenols are 2,2-bis-(4-hydroxyphenyl)-propane, 2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane and 1,1-bis-(4-hydroxyphenyl)-cyclohexane.

45 The most preferred bisphenol is 2,2-bis-(4-hydroxyphenyl)-propane (bisphenol A).

The polycarbonates of the invention may entail in their structure units derived from one or more of the suitable bisphenols.

Among the resins suitable in the practice of the invention are included phenolphthalein-based polycarbonate, copolycarbonates and terpolycarbonates such as are described in U.S.-A-3,036,036 and 4,210,741.

50 The polycarbonates of the invention may also be branched by condensing therein small quantities, e.g., 0.05-2.0 mol % (relative to the bisphenols) of polyhydroxyl compound. Polycarbonates of this type have been described, for example, in DE-A-1,570,533; 2,116,974 and 2,113,374; British Patents 885,442 and 1,079,821 and U.S.-A-3,544,514. The following are some examples of polyhydroxyl compounds which may be used for this purpose: phloroglucinol; 4,6-dimethyl-2,4,6-tri-(4-hydroxyphenyl)-heptane; 1,3,5-tri-(4-hydroxyphenyl)-benzene; 1,1,1-tri-(4-hydroxyphenyl)-ethane; tri-(4-hydroxyphenyl)-phenylmethane; 2,2-bis-[4,4-(4,4'-dihydroxydiphenyl)-cyclohexyl]-propane; 2,4-bis-(4-hydroxy-1-isopropylidene)-phenol; 2,6-bis-(2'-dihydroxy-5'-methylbenzyl)-4-methylphenol; 2,4-dihydroxy-benzoic acid; 2-(4-hydroxyphenyl)-2-(2,4-dihydroxyphenyl)-propane and 1,4-bis-(4,4'-dihydroxytriphenylmethyl)-benzene. Some of the other polyfunc-

tional compounds are 2,4-dihydroxybenzoic acid, trimesic acid, cyanuric chloride and 3,3-bis-(4-hydroxyphenyl)-2-oxo-2,3-dihydroindole.

In addition to the polycondensation process mentioned above, other processes for the preparation of the polycarbonates of the invention are polycondensation in a homogenous phase and transesterification.

5 The suitable processes are disclosed in U.S.-A-3,028,365; 2,999,846; 3,153,008; and 2,991,273.


The preferred process for the preparation of polycarbonates is the interfacial polycondensation process.

Other methods of synthesis in forming the polycarbonates of the invention such as disclosed in U.S.-A-3,912,688 may be used.

10 Suitable polycarbonate resins are available in commerce, for instance, Makrolon FCR, Makrolon 2600, Makrolon 2800 and Makrolon 3100, all of which are bisphenol A based homopolycarbonate resins differing in terms of their respective molecular weights and characterized in that their melt flow indices (MFR) per ASTM D-1238 are about 16.5-24, 13-16, 7.5-13.0 and 3.5-6.5 gm/10 min., respectively. These are products of Mobay Corporation of Pittsburgh, Pennsylvania.

The stabilization agent in accordance with the present invention conforms structurally to formula (I)

15

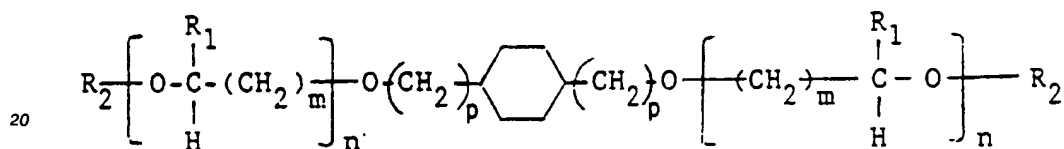

wherein R_1 denotes a hydrogen atom or a C_1 - C_4 alkyl, R_2 denotes a silyl or pyranyl group, n is an integer of from 0 to 70, p is 0 or 1 and m is 1 to 4.

25 The end-capped stabilizer of the invention may be readily synthesized following conventional procedures. For instance, a hydroxy terminated polyol precursor may be prepared using known techniques such as alkylene oxide polymerization. The examples (1 and 2) demonstrate the preparation of the end-capped polyether.

30 The invention is further illustrated by the following examples in which all parts and percentages are by weight unless otherwise specified.

EXAMPLES

EXAMPLE 1

35

Preparation of cyclohexane dimethanol initiated polypropylene glycol with dihydropyran end-capping.

300 gms of a polyol (M_w about 2000; and hydroxy number of about 45-60) conforming to formula (I) wherein $R_1 = CH_3$, $R_2 = H$ and $m = 1$

40 were introduced along with 26.4 gm of dihydropyran and 0.25 gm of p-toluene sulfonic acid (catalyst) in about 300 ml of cyclohexane. The reaction temperature was raised to 65°C and held at that level for 10 hours and then allowed to cool. A stoichiometric amount of trimethylamine was added to neutralize the acid catalyst. The resulting liquid was then filtered and vacuum distilled to remove the residual solvent.


EXAMPLE 2

45

Preparation of trimethylchlorosilane and end-capped cyclohexane dimethanol initiated polypropylene glycol.

The reaction scheme is shown below

50

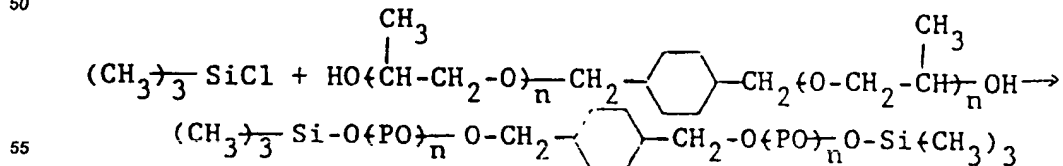

where (PO) represents propylene oxide units.

The polyol (300 gm) was mixed with hexane (450 ml) and triethylamine (30.3 gm) was added as a catalyst and hydrogen chloride scavenger. The trimethylchlorosilane (65.78 gm) was added dropwise to the mixture upon which addition a cloudy solution was immediately formed. The mixture was stirred for 5 hours and filtered. The product was a liquid.

5 The end-capped polyether of the invention was incorporated in a polycarbonate resin and specimens were molded from the composition. The specimens were subjected to gamma radiation and the change in yellowness index was measured and is reported below. The effect of the radiation was determined on specimens which were injection molded at 287,8 °C (550 °F) and at 343,3 °C (650 °F).

10 In all the experiments, the polycarbonate was Makrolon FCR resin which is a bisphenol-A based polycarbonate having a melt flow rate of about 19 gm/10 min per ASTM D-1238 - a product of Mobay Corporation. In Table 1 there is shown the effect of gamma radiation on specimens molded from polycarbonate resin which contained no stabilizing additives.

TABLE 1

15

EFFECT OF GAMMA RADIATION STABILIZERS IN POLYCARBONATE COMPOSITIONS					
STABILIZER CONC. (%)	RADIATION DOSE ¹	YELLOWNESS INDEX*	YELLOWNESS INDEX**	ΔYI*	ΔYI**
MAKROLON 2400 Containing no Additives	0.0	4.07	4.17	--	--
	2.5	12.10	10.35	8.03	6.18
	5.0	16.89	13.98	12.82	9.81

¹ Dose in megarads

25

* Molded at 287,8 °C (550 °F)

**Molded at 343,3 °C (650 °F)

30 Tables 2 and 3 show the corresponding effects on polycarbonate molded specimens which were stabilized in accordance with the invention. The efficacy of the stabilizer prepared in Example 1 is shown in Table 2.

TABLE 2

35

EFFECT OF GAMMA RADIATION STABILIZERS IN POLYCARBONATE COMPOSITIONS (DIHYDROPYRAN TERMINATED)					
STABILIZER CONC. (%)	RADIATION DOSE ¹	YELLOWNESS INDEX*	YELLOWNESS INDEX**	ΔYI*	ΔYI**
0.5	0.0	2.61	2.91	--	--
	2.5	5.76	5.51	3.15	2.60
	5.0	7.92	7.24	5.31	4.33
1.0	0.0	2.51	2.07	--	--
	2.5	4.97	5.51	2.46	3.44
	5.0	7.41	6.76	4.90	4.69

¹ Dose in megarads

* Molded at 287,8 °C (550 °F)

**Molded at 343,3 °C (650 °F)

50

Table 3 reports the stabilizing efficacy of the stabilizer prepared in accordance with Example 2.

55

TABLE 3

EFFECT OF GAMMA RADIATION STABILIZERS IN POLYCARBONATE COMPOSITIONS (TRIMETHYLSILANE TERMINATED)					
STABILIZER CONC. (%)	RADIATION DOSE ¹	YELLOWNESS INDEX*	YELLOWNESS INDEX**	ΔYI^*	ΔYI^{**}
0.5	0.0	2.73	3.10	--	--
	2.5	6.08	5.25	3.35	2.15
	5.0	8.61	7.79	5.88	4.69
1.0	0.0	2.90	3.08	--	--
	2.5	5.71	4.75	2.81	1.67
	5.0	8.44	6.86	5.44	3.78

¹ Dose in megarads

* Molded at 287,8 °C (550 °F)

**Molded at 343,3 °C (650 °F)

While the yellowness index of polycarbonate compositions containing the end-capped version of the stabilizer is comparable to that of the compositions of the invention the later is further characterized by its superior thermal stability and virtual freedom from splay.

EXAMPLE 3

Additional embodiments of the invention were prepared and evaluated. The preparation of polycarbonate compositions containing 1.0% by weight of a stabilizer followed conventional procedures and the molded parts were exposed to gamma radiation as noted below and their yellowness index determined. The results are tabulated below.

TABLE 4

Composition	Yellowness Index After gamma radiation (M rads)		
	0	3.5	5.0
Polycarbonate resin ⁽¹⁾ (Control)	3.35	13.05	26.31
Polycarbonate + 1% of Cyclohexanedimethanol bis-DHP ⁽²⁾	3.79	8.98	12.93
Polycarbonate + 1% of cyclohexane-diol bis-DHP ⁽²⁾	3.25	7.42	N.D. ⁽³⁾

(1) Homopolycarbonate of bisphenol A.

(2) Dihydropyran termination.

(3) Not determined.


The compositions of the invention may be prepared by following conventional procedures for the preparation of polycarbonate molding compositions. The stabilizing agent may be introduced by directly mixing it with the polycarbonate. Alternately, the stabilizer may be introduced to the reaction vessel of the polycarbonate resins.

Other conventional additives may also be incorporated in the composition for their art-recognized utility. These include release agents, plasticizers, stabilizers, antioxidants, fillers and reinforcements.

Claims

1. A polycarbonate molding composition comprising
 - (i) an aromatic polycarbonate resin and

(ii) a stabilizing agent conforming to formula (I)

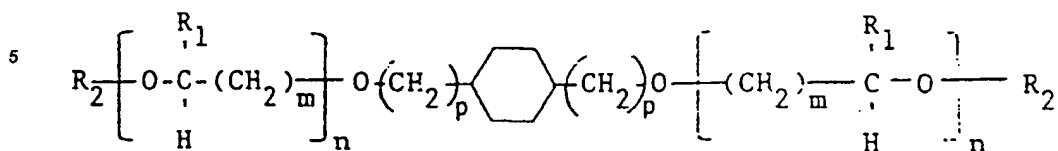


wherein R_1 denotes a hydrogen atom or a C_1 - C_4 alkyl, R_2 denotes a silyl or pyranyl group, n is an integer of from 0 to 70, p is 0 or 1 and m is 1 to 4, wherein said stabilizing agent (ii) is present in an amount of 0.5 to 5.0 percent relative to the weight of the composition.

2. The composition of Claim 1 wherein said R_2 is a pyran radical.
3. The composition of Claim 1 wherein said R_2 is a silane radical.
4. The composition of Claim 1 wherein said polycarbonate is a homopolymer based on bisphenol A.
5. The composition of claim 1 wherein said R_1 is a hydrogen atom.
6. The composition of Claim 1 wherein said R_1 is a C_1 - C_4 alkyl radical.

Patentansprüche

1. Polycarbonat-Formmasse, umfassend
 - (i) ein aromatisches Polycarbonat-Harz und
 - (ii) ein Stabilisierungsmittel, das der Formel (I)



entspricht, in der


- R_1 ein Wasserstoff-Atom oder ein C_1 - C_4 -Alkyl bezeichnet,
 R_2 eine Silyl- oder Pyranyl-Gruppe bezeichnet,
 n eine ganze Zahl von 0 bis 70 ist,
 p 0 oder 1 ist und
 m 1 bis 4 ist,

worin das Stabilisierungsmittel (ii) in einer Menge von 0,5 bis 5,0 %, bezogen auf das Gesamtgewicht der Formmasse, vorliegt.

2. Formmasse nach Anspruch 1, worin R_2 ein Pyran-Rest ist.
3. Formmasse nach Anspruch 1, worin R_2 ein Silan-Rest ist.
4. Formmasse nach Anspruch 1, worin das Polycarbonat ein von Bisphenol-A abgeleitetes Homopolycarbonat ist.
5. Formmasse nach Anspruch 1, worin R_1 ein Wasserstoff-Atom ist.
6. Formmasse nach Anspruch 1, worin R_1 ein C_1 - C_4 -Alkyl-Rest ist.

Revendications

1. Composition à mouler de polycarbonate comprenant
 (i) une résine de polycarbonate aromatique et
 (ii) un agent stabilisant suivant la formule (I)

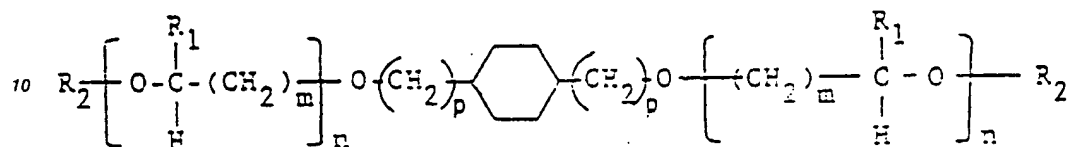

dans laquelle R_1 représente un atome d'hydrogène ou un groupement alkyle en C_1 - C_4 , R_2 représente un groupement silyle ou pyranyle, n représente un nombre entier compris entre 0 et 70, p vaut 0 ou 1 et m est compris entre 1 et 4, dans laquelle ledit agent stabilisant (ii) est présent à raison de 0,5 à 5,0 % par rapport à la masse de la composition.

2. Composition selon la revendication 1, dans laquelle ledit R_2 est un radical pyranne.
3. Composition selon la revendication 1, dans laquelle ledit R_2 est un radical silane.
4. Composition selon la revendication 1, dans laquelle ledit polycarbonate est un homopolymère à base de bisphénol A.
5. Composition selon la revendication 1, dans laquelle ledit R_1 est un atome d'hydrogène.
6. Composition selon la revendication 1, dans laquelle ledit R_1 est un radical alkyle en C_1 - C_4 .